MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS-1963-A

Technical Report 742
(Rev 1)

DYNAMIC EQUATIONS FOR INITIALIZATION OF THE VERTICAL LAUNCH ASROC AUTOPILOT

DH Lackowski

AUGUST 1982

Research Report: July 1982

NOSC

NAVAL OCEAN SYSTEMS CENTER
San Diego, California 92152

SECURITY CLASSIFICATION OF THIS PAGE *(When Data Entered)*

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NOSC Technical Report 742 (TR 742) (Rev 1)	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE *(and Subtitle)* DYNAMIC EQUATIONS FOR INITIALIZATION OF THE VERTICAL LAUNCH ASROC AUTOPILOT		5. TYPE OF REPORT & PERIOD COVERED Research report July 1982
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) D.H. Lackowski		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Ocean Systems Center San Diego, CA 92152		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 64353N
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Sea Systems Command Washington, DC		12. REPORT DATE August 1982
		13. NUMBER OF PAGES 22
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. *(of this report)* Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT *(of this Report)*

Approved for public release; distribution unlimited

17. DISTRIBUTION STATEMENT *(of the abstract entered in Block 20, if different from Report)*

18. SUPPLEMENTARY NOTES

19. KEY WORDS *(Continue on reverse side if necessary and identify by block number)*

Fire control
Ship-launched missile
Reference frames
Autopilot

20. ABSTRACT *(Continue on reverse side if necessary and identify by block number)*

This report defines the reference coordinate frames and provides the dynamic equations required to support development of autopilot initialization algorithms in the fire control computer for the Vertical Launch ASROC system.

DD $_{1 \text{ JAN } 73}^{\text{FORM}}$ **1473** EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

SECURITY CLASSIFICATION OF THIS PAGE *(When Data Entered)*

FOREWORD

This document incorporates the first set of revisions to the original report published in November 1981. Paragraphs herein containing new or revised material are identified by the symbol (R) following the section or paragraph heading.

Accession For		
NTIS GRA&I	☒	
DTIC TAB	☐	
Unannounced	☐	
Justification		
By		
Distribution/		
Availability Codes		
Dist	Avail and/or Special	
A		)

DTIC
COPY
INSPECTED

CONTENTS

INTRODUCTION (R)

This report defines the reference coordinate frames and provides the dynamic equations required to support development of autopilot initialization algorithms in the fire control computer for the Vertical Launch ASROC system. The report presents a mathematical definition of the dynamic data required by the missile autopilot for prelaunch initialization. These include:

(1) Attitude of the command reference frame relative to the autopilot reference frame

(2) Velocity of the launch point reference relative to the moving air mass

NOTATION FOR VECTORS AND ORTHOGONAL TRANSFORMATIONS

We understand that $\bar{r}$ represents a vector quantity without reference to any particular coordinate frame. If we wish to specify the vector $\bar{r}$ expressed in terms of $x_i y_i z_i$ coordinates, we use $\bar{r}_i$.

The orthogonal transformation A_{ij} represents the transformation from the $x_i y_i z_i$ coordinate frame to the $x_j y_j z_j$ frame. Thus:

$$\bar{x}_j = A_{ij} \bar{x}_i \tag{1}$$

The inverse transformation (from $x_j y_j z_j$ to $x_i y_i z_i$) may be indicated by A_{ji} or, equivalently, A_{ij}^T (the transpose of A_{ij}). The vector $\bar{r}$ is understood to have scalar components r_x, r_y, and r_z:

$$\bar{r} = [r_x \; r_y \; r_z]^T \tag{2}$$

while $\bar{r}_i$ has components:

$$\bar{r}_i = [r_{xi} \; r_{yi} \; r_{zi}]^T \tag{3}$$

4
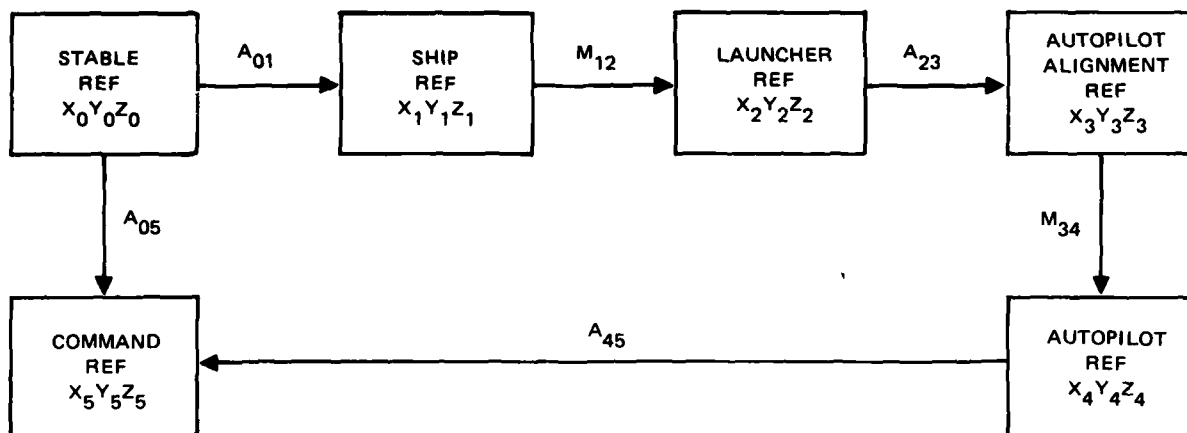
Figure 1. Reference Coordinate Frames

STABLE REFERENCE $(x_0 y_0 z_0)$

x_0 and y_0 lie in the local horizontal plane with positive x_0 true north and positive y_0 east (Fig 2). Positive z_0 is the local vertical-downward. We assume $x_0 y_0 z_0$ is an inertial reference frame.

Figure 2. Stable Reference Frame

SHIP REFERENCE $(x_1 y_1 z_1)$

The ship reference axes (Fig 3) are the body axes of the ship used as the reference for measurement of the roll (ϕ), pitch (θ), and yaw (ψ) angles of the ship. These axes correspond, for example, to the axes of the MK 19 Gyro-compass or AN/WSN-5 Inertial System. The axes are fixed in attitude relative

to the ship and rotate with the ship relative to the stable reference $(x_0 y_0 z_0)$. x_1 is the roll axis of the ship with positive x_1 forward, y_1 is the pitch axis, positive to starboard, and z_1 is the yaw axis with positive downward.
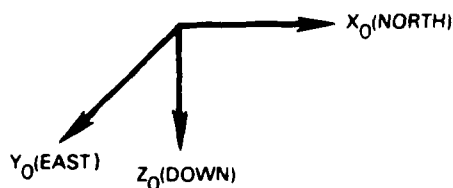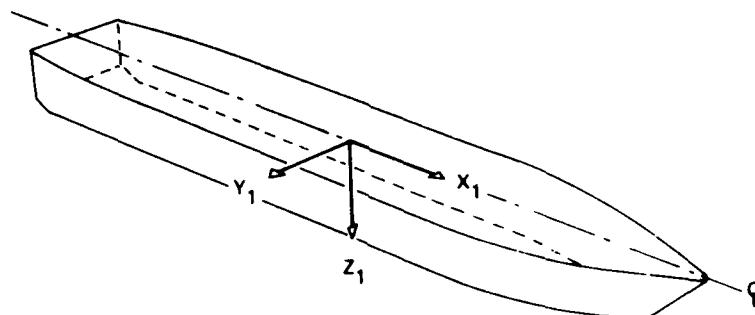

Figure 3. Ship Reference Frame

The attitude of the ship reference $(x_1 y_1 z_1)$ relative to the stable reference $(x_0 y_0 z_0)$ is a consequence of the ordered Euler angle rotations:

(1) ψ about the z-axis (yaw or heading)

(2) θ about the y-axis (pitch)

(3) ϕ about the x-axis (roll)

The orthogonal transformation from the stable reference $(x_0 y_0 z_0)$ to the ship reference $(x_1 y_1 z_1)$ is:

$$A_{01} = \begin{bmatrix} c\psi\,c\theta & s\psi\,c\theta & -s\theta \\ c\psi s\theta s\phi - s\psi c\phi & s\psi s\theta s\phi + c\psi c\phi & c\theta s\phi \\ c\psi s\theta c\phi + s\psi s\phi & s\psi s\theta c\phi - c\psi s\phi & c\theta c\phi \end{bmatrix} \qquad (4)$$

where c and s denote the cosine and sine functions.

The ship reference frame, as defined above, corresponds to the reference frame conventionally used for attitude reference in virtually all modern technical publications, ie, positive roll and yaw motions are to starboard and

6

positive pitch corresponds to a bow-up attitude. OP 1700 (Standard Fire Control Symbols) does not conform to this convention, but instead defines positive roll motion to port and positive pitch as bow-down attitude. This report will continue to use the conventional definitions. The modifications required to use the OP 1700 definitions are presented in the Appendix.

LAUNCHER REFERENCE $(x_2 y_2 z_2)$

The vertical launching system, when installed, is nominally aligned with the ship reference axes $(x_1 y_1 z_1)$. In fact, however, these axes are generally not used directly because of structural obstructions. Instead, the launching system is aligned with respect to some launcher reference $(x_2 y_2 z_2)$ which was, in turn, previously aligned with respect to the ship reference $(x_1 y_1 z_1)$. The transformation M_{12} represents the misalignment between the ship reference $(x_1 y_1 z_1)$ and the launcher reference $(x_2 y_2 z_2)$ and is a function of static and dynamic alignment errors due to errors in initial alignment and subsequent structural flexure.
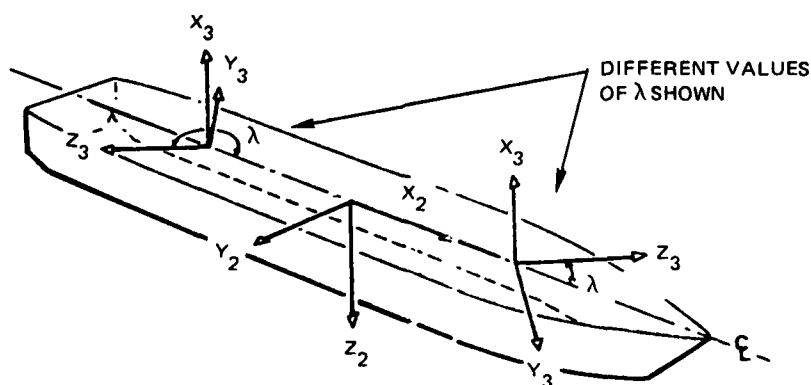

AUTOPILOT ALIGNMENT REFERENCE $(x_3 y_3 z_3)$ (R)

Figure 4. Autopilot Alignment Reference

7

The autopilot alignment reference axes $(x_3 y_3 z_3)$ (Fig 4) represent the nominal (or intended) axes of the autopilot, that is, the autopilot axes when the missile, in its canister and cell, has been aligned, without error, with respect to the launcher reference $(x_2 y_2 z_2)$. x_3 is the roll axis of the autopilot, y_3 the pitch axis, and z_3 the yaw axis. Positive x_3 is forward in the missile and positive y_3 is to starboard.

The configuration of the vertical launch system is such that, with the missile and its canister loaded into one of the cells, the positive x_3 axis is in the direction of negative z_2 and positive z_3 is at an angle λ to port of positive x_2. Positive y_3 completes the right-handed triad.

The angle λ will generally be different for missiles loaded in different cells, but will be a constant for a given cell. Thus λ will be known, when a particular cell is selected for launch.

The attitude of the autopilot alignment reference $(x_3 y_3 z_3)$ relative to the launcher reference $(x_2 y_2 z_2)$ is a consequence of the ordered Euler angle rotations:

(1) 90° about the y axis

(2) λ about the x axis

The orthogonal transformation from the launcher reference $(x_2 y_2 z_2)$ to the autopilot alignment reference $(x_3 y_3 z_3)$ is:

$$A_{23} = \begin{bmatrix} 0 & 0 & -1 \\ s\lambda & c\lambda & 0 \\ c\lambda & -s\lambda & 0 \end{bmatrix} \qquad (5)$$

8

AUTOPILOT REFERENCE $(x_4 y_4 z_4)$

The autopilot reference axes $(x_4 y_4 z_4)$ represent the actual reference axes of the autopilot $(x_4$-roll, y_4-pitch, z_4-yaw) with the missile and its canister loaded into a cell. The transformation M_{34} then represents the misalignment error of the autopilot axes $(x_4 y_4 z_4)$ relative to the autopilot alignment reference $(x_3 y_3 z_3)$.
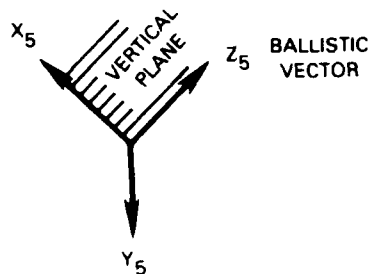
COMMAND REFERENCE $(x_5 y_5 z_5)$

Figure 5. Command Reference

The command reference $(x_5 y_5 z_5)$ is used as an attitude control reference by the autopilot (Fig 5). The positive z_5 axis is in the direction of the ballistic vector. Positive x_5 and positive z_5 lie in a vertical plane with positive x_5 upwards. y_5 completes the right-handed triad.

The ballistic vector is defined by an azimuth angle A measured in the horizontal plane from true north and an elevation angle E, the angle above the horizontal plane, measured in the vertical plane. Then the attitude of the command reference $(x_5 y_5 z_5)$ relative to the stable reference $(x_0 y_0 z_0)$ is a consequence of the following ordered Euler angle rotations:

(1) 90° about y (reorientation of axes)

(2) -A about x (azimuth)

(3) E about y (elevation)

9

The orthogonal transformation from the stable reference $(x_0 y_0 z_0)$ to the command reference $(x_5 y_5 z_5)$ is:

$$A_{05} = \begin{bmatrix} -cAsE & -sAsE & -cE \\ -sA & cA & 0 \\ cAcE & sAcE & -sE \end{bmatrix} \tag{6}$$

ATTITUDE OF COMMAND REFERENCE $(X_5 Y_5 Z_5)$

RELATIVE TO AUTOPILOT REFERENCE $(x_4 y_4 z_4)$

The orthogonal tranformation A_{45} (Fig 1) describes the attitude of the command reference $(x_5 y_5 z_5)$ relative to the autopilot reference $(x_4 y_4 z_4)$. A_{45} is computed as the product of known matrices:

$$A_{45} = A_{05} \ A_{01}^T \ M_{12}^T \ A_{23}^T \ M_{34}^T \qquad (7)$$

A_{01} and A_{05} are computed as indicated by Eq (4) and (6). A_{23} is computed as a function of λ as indicated by Eq (5). The parameter λ is a constant for a particular cell and will be provided (or some equivalent parameter) by the Launcher Control Unit (LCU) following cell selection.

The source of the misalignment transformations, M_{12} and M_{34}, is presently not known, pending results of current studies of system misalignment errors. These may be provided, in full or in part, by the LCU, may be computed in the fire control computer from externally provided data, or may be produced by some external subsystem dedicated to misalignment correction. In any event, the tranformations will be provided to the fire control computer for autopilot initialization.

PREDICTED ATTITUDE OF COMMAND REFERENCE $(x_5 y_5 z_5)$
RELATIVE TO AUTOPILOT REFERENCE $(x_4 y_4 z_4)$

Let the vector $\bar{\alpha}$ denote the angular velocity of the autopilot reference $(x_4 y_4 z_4)$ relative to the stable reference $(x_0 y_0 z_0)$ and let $\bar{\beta}$ represent the angular velocity of the command reference axes $(x_5 y_5 z_5)$ relative to the stable reference $(x_0 y_0 z_0)$.

The time derivative of the orthogonal transformation A_{45} is given by:

$$\dot{A}_{45} = A_{45} \Omega \qquad (8)$$

where Ω is the skew-symmetric matrix:

$$\Omega = \begin{bmatrix} 0 & (\beta_{z4} - \alpha_{z4}) & (\alpha_{y4} - \beta_{y4}) \\ (\alpha_{z4} - \beta_{z4}) & 0 & (\beta_{x4} - \alpha_{x4}) \\ (\beta_{y4} - \alpha_{y4}) & (\alpha_{x4} - \beta_{x4}) & 0 \end{bmatrix} \qquad (9)$$

The angular velocity vector $\bar{\alpha}$, in the absence of dynamic flexure, is identical to the ship's angular velocity vector $\bar{\omega}$, which can be computed from ship's roll, pitch, and yaw rates ($\dot{\phi}$, $\dot{\theta}$, $\dot{\psi}$, respectively). Then, assuming no dynamic flexure, we compute $\bar{\alpha}$ in ship reference $(x_1 y_1 z_1)$ coordinates:

$$\alpha_{x1} = -\dot{\psi} s\theta + \dot{\phi} \qquad (10)$$

$$\alpha_{y1} = \dot{\psi} c\theta s\phi + \dot{\theta} c\phi$$

$$\alpha_{z1} = \dot{\psi} c\theta c\phi - \dot{\theta} s\phi$$

The angular velocity $\bar{\beta}$ must be computed from the dynamics of the command reference frame $(x_5 y_5 z_5)$. Specifically, the azimuth and elevation rates, $\dot{A}$ and $\dot{E}$, respectively, must be computed. Then $\bar{\beta}$, in stable reference coordinates $(x_0 y_0 z_0)$, is:

$$\beta_{x0} = -\dot{E} s A \qquad (11)$$

$$\beta_{y0} = \dot{E} c A$$

$$\beta_{z0} = -\dot{A}$$

The differential equation [Eq (8)] provides the basis for prediction or update of the transformation A_{45}. If we wish to predict from time t to $t + T$, we can expand A_{45} in a Taylor series and use the first two terms as a first order approximation:

$$A_{45}(t + T) \approx A_{45}(t) + T\dot{A}_{45}(t) \tag{12}$$

Other, more sophisticated, approximations are common in the literature and can be provided, if required.

LEAST SQUARES ORTHOGONALIZATION OF NONORTHOGONAL MATRICES

Because of numerical errors in digital computations and slightly nonorthogonal reference axes, algorithms for the matrix equations described herein generally produce slightly nonorthogonal matrices. The nonorthogonality can, in some instances, produce adverse effects. Thus it is common in such computations to include some subroutine to orthogonalize the computed transformations. A first-order, least-squares algorithm for orthogonalization is described below.

Let A represent a computed transformation matrix which is "near-orthogonal." The least squares algorithm:

$$\widetilde{A} = A \ (A^T A)^{-1/2} \tag{13}$$

provides an orthogonal transformation $\widetilde{A}$ which is nearest to A in a least squares sense. That is, the algorithm minimizes the error measure e:

$$e = TR[(A-\widetilde{A})^T (A-\widetilde{A})] \tag{14}$$

(where TR indicates the matrix trace function) subject to the constraint that $\widetilde{A}$ be orthogonal:

$$\widetilde{A}\widetilde{A}^T - I = 0 \tag{15}$$

Equation (13) is computationally difficult because the square root function requires computation of eigenvalues. In practice, a first order approximation is usually sufficient:

$$\widetilde{A} = A + 1/2 \ A \ (I - A^T A) \tag{16}$$

Other, more sophisticated, orthogonalization algorithms are common in the literature.

VELOCITY OF THE LAUNCH POINT REFERENCE
RELATIVE TO THE MOVING AIR MASS (R)
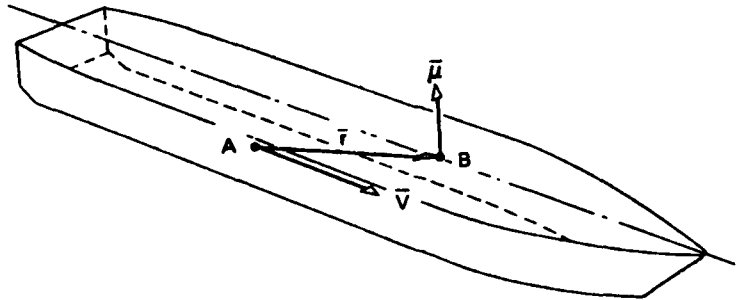
We define the following vectors (see Fig 6):

Figure 6. Ship Vectors

(1) $\bar{v}$ = ship's inertial velocity measured at some reference point A in the ship.

(2) $\bar{\mu}$ = inertial velocity of the autopilot reference point (point B).

(3) $\bar{r}$ = displacement vector from point A (ship's velocity reference) to point B (autopilot reference).

(4) $\bar{\omega}$ = angular velocity of the ship relative to the stable reference $(x_0 y_0 z_0)$.

(5) $\bar{w}$ = inertial wind velocity.

Since we have assumed that the stable reference $(x_0 y_0 z_0)$ is an inertial reference, all inertial velocities are computed relative to that reference.

Autopilot initialization requires the velocity of the autopilot reference (B) relative to the moving air mass in command reference coordinates $(x_5 y_5 z_5)$, that is, the vector quantity $\bar{\mu}_5 - \bar{w}_5$.

15

The vectors $\bar{v}$ (ship's velocity) and $\bar{w}$ (wind velocity) are measurements in stable reference coordinates $(x_0 y_0 z_0)$ provided to the fire control system. The vector $\bar{r}$ is provided by the LCU when a particular cell has been selected. We assume that $\bar{r}$ is provided in ship reference coordinates $(x_1 y_1 z_1)$.

The angular velocity vector $\bar{\omega}$ may be computed in ship reference coordinates $(x_1 y_1 z_1)$ from ship roll, pitch, and yaw rates by means of Eq (10):

$$
\begin{aligned}
\omega_{x1} &= -\dot{\psi} s\theta + \dot{\phi} \\
\omega_{y1} &= \dot{\psi} c\theta s\phi + \dot{\theta} c\phi \\
\omega_{z1} &= \dot{\psi} c\theta c\phi - \dot{\theta} s\phi
\end{aligned}
\tag{17}
$$

Then:

$$
\begin{aligned}
\bar{u}_5 - \bar{w}_5 &= \bar{v}_5 + (\bar{\omega}_5 \times \bar{r}_5) - \bar{w}_5 \\[6pt]
&= A_{05} \, [\bar{v}_5 - \bar{w}_5 + A_{01}^T (\bar{\omega}_1 \times \bar{r}_1)]
\end{aligned}
\tag{18}
$$

where x indicates the vector cross product.

PREDICTED VELOCITY OF THE LAUNCH POINT REFERENCE RELATIVE
TO THE MOVING AIR MASS (R)

A simple linear extrapolation algorithm can be used to provide a first-order estimate of launch point reference velocity in the moving air mass at some future time.

To simplify notation, let:

$$\bar{x} = \bar{\mu}_5 - \bar{w}_5 \tag{19}$$

Then, a first-order estimate of $\bar{x}$ at time $t + T_1$ can be determined from computed values of $\bar{x}$ at times t and $t - T_2$:

$$\bar{x}(t + T_1) \approx \bar{x}(t) + T_1 \left[\frac{\bar{x}(t) - \bar{x}(t-T_2)}{T_2} \right] \tag{20}$$

Other, more complex nonlinear extrapolation algorithms may be used, if this simple linear extrapolation is inadequate.

BIBLIOGRAPHY

Bar-Itzhack, I.Y. and Fegley, K.A., "Orthogonalization Techniques of a Direction Cosine Matrix," *IEEE Transactions on Aerospace and Electronic Systems*, September 1969.

Browne, B.H. and Lackowski, D.H., Estimation of Dynamic Alignment Errors in Shipboard Fire Control Systems," *Proceedings of the IEEE Conference on Decision and Control*, December 1976.

Britting, Kenneth, R., *Inertial Navigation Systems Analysis,* Wiley-Interscience, 1971.

Carta, David G. and Lackowski, Donald H., "Estimation of Orthogonal Transformations in Strapdown Inertial Systems," *IEEE Transactions on Automatic Control*, February 1972.

Edwards, Andrew, Jr., "The State of Strapdown Inertial Guidance and Navigation," *Navigation*, Winter 1971-72.

Farrell, James L., *Integrated Aircraft Navigation*, Academic Press, 1976.

Goldstein, Herbert, *Classical Mechanics*, Chapter 4: "Kinematics of Rigid Body Motion," Addison-Wesley, 1950.

Lackowski, Donald H., "The Quaternion as a Four Parameter Representation of Attitude," NOSC Memo serial 6211/033:80, 01 July 1980.

Mayer, Arthur, "Rotations and their Algebra," *SIAM Review*, April 1960.

Wilcox, James C., "A New Algorithm for Strapped-Down Inertial Navigation," *IEEE Transactions on Aerospace and Electronic Systems*, September 1967.

US Navy Department, Bureau of Ordnance, STANDARD FIRE CONTROL SYMBOLS (OP 1700), Vol 1

APPENDIX

MODIFIED EQUATIONS FOR OP 1700 DEFINITIONS (R)

OP 1700 (Standard Fire Control Symbols) defines own-ship yaw motion as positive to starboard, roll motion as positive to port, and positive pitch as bow-down attitude. Using these definitions, Fig A-1 illustrates the ship reference frame $(x_1 y_1 z_1)$. The attitude of the ship reference $(x_1 y_1 z_1)$ relative to the stable reference $(x_0 y_0 z_0)$ is a consequence of the following ordered Euler angle rotations:

(1) 180° about the z-axis (reorient axes)

(2) ψ about the z-axis (yaw)

(3) θ about the y-axis (pitch)

(4) ϕ about the x-axis (roll)

Then the orthogonal transformation from the stable reference $(x_0 y_0 z_0)$ to the ship reference is:

$$A_{01} = \begin{bmatrix} -c\psi c\theta & -s\psi c\theta & -s\theta \\[2mm] -c\psi s\theta s\phi & -s\psi s\theta s\phi & +c\theta s\phi \\ +s\psi c\phi & -c\psi c\phi & \\[2mm] -c\psi s\theta c\phi & -s\psi s\theta c\phi & +c\theta c\phi \\ -s\psi s\phi & +c\psi s\phi & \end{bmatrix} \qquad (A-1)$$

The launcher reference frame $(x_2 y_2 z_2)$ and ship reference frame $(x_1 y_1 z_1)$ are assumed to be nominally aligned. Thus a change in orientation of the ship reference $(x_1 y_1 z_1)$ requires a corresponding reorientation of the launcher reference $(x_2 y_2 z_2)$. Therefore the transformation A_{23} will change, since the launcher reference $(x_2 y_2 z_2)$ is reoriented without a corresponding reorientation of the autopilot alignment reference $(x_3 y_3 z_3)$.

The transformation from the launcher reference $(x_2 y_2 z_2)$ to the autopilot alignment reference is a consequence of the following ordered Euler angle rotations (see Fig A-2):

(1)   180° about the z-axis

(2)   90° about the y-axis

(3) λ about the x-axis

Then the transformation A_{23} is given by:

$$A_{23} = \begin{bmatrix} 0 & 0 & -1 \\ -s\lambda & -c\lambda & 0 \\ -c\lambda & s\lambda & 0 \end{bmatrix} \tag{A-2}$$

No other modifications to the equations in the body of this report are necessary, when the OP 1700 definitions of own-ship roll, pitch, and yaw are used.

To summarize: When using the OP 1700 definitions in place of the conventional definitions, replace Fig 3 and 4 with Fig A-1 and A-2, respectively, and replace Eq (4) and (5) with Eq (A-1) and (A-2), respectively.
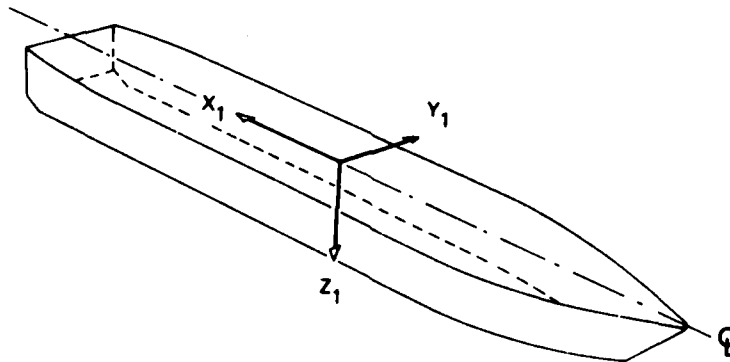

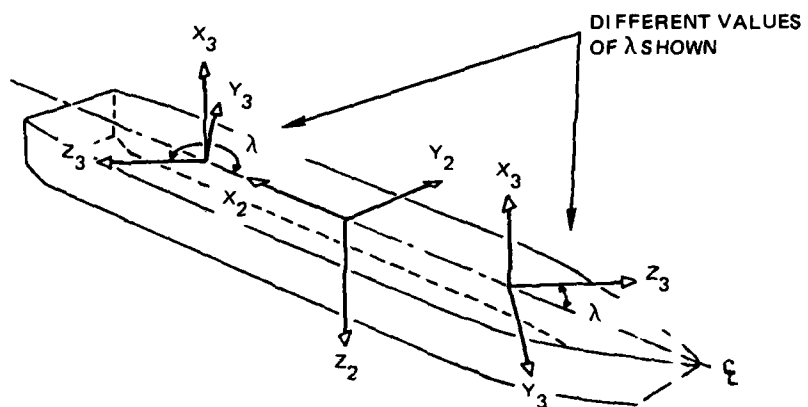Figure A-1. Ship Reference Frame (OP 1700 Standard)

Figure A-2. Autopilot Alignment Reference $(X_3Y_3Z_3)$ and Launcher Reference Frame $(X_2Y_2Z_2)$ (OP 1700 Standard)

END

FILMED

1-83

DTIC